


回転用ツイスターリング

12. 回転用ツイスターリング

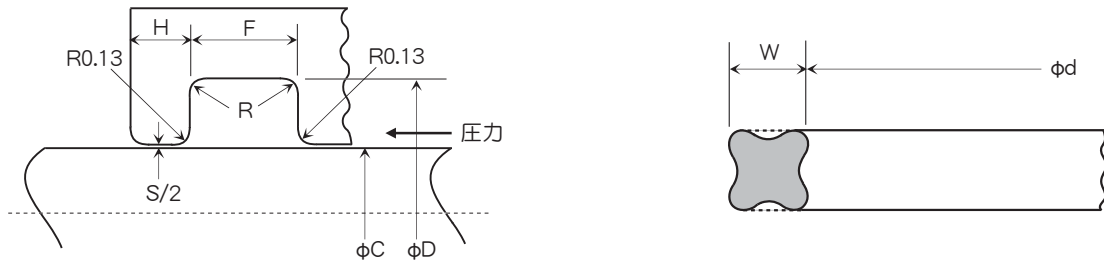

(単位: mm)

呼び番号	軸径 C		ツイスターリングの寸法		みぞ寸法			H	直径での すきま S		
			幅 W	内径 d	内径 D	幅 F	角面 R				
TS-7	7.0		2.1 ±0.1 (±0.2)	7.40	10.7	2.6	0.4	2 以下	0.18 以下		
TS-8	8.0	+0		8.40						11.7	
TS-9	9.0	-0.015		9.40						12.7	
TS-10	10.0			10.40						13.7	
TS-11	11.0	+0 -0.018	2.7 ±0.1 (±0.2)	11.50	23.9	3.2	0.4	5 以下			
TS-12	12.0			12.50						16.9	
TS-13	13.0			13.60						17.9	
TS-14	14.0			14.60						18.9	
TS-15	15.0			15.60						19.9	
TS-16	16.0			16.80						20.9	
TS-17	17.0			17.80						21.9	
TS-18	18.0			19.00						22.9	
TS-19	19.0	20.00	23.9	+0 -0.05	+0.13 -0	0.8	制限 なし				
TS-20	20.0	21.20	24.9								
TS-21	21.0	22.20	25.9								
TS-22	22.0	23.20	26.9								
TS-24	24.0	25.20	31.9								
TS-25	25.0	26.20	32.9								
TS-26	26.0	27.20	33.9								
TS-28	28.0	29.20	35.9								
TS-30	30.0	31.20	37.9								
TS-32	32.0	33.20	39.9								
TS-35	35.0	36.30	42.9					±0.15 (±0.3)	5.1	0.8	0.22 以下
TS-38	38.0	39.30	45.9								
TS-40	40.0	41.40	47.9								
TS-42	42.0	43.50	49.9								
TS-45	45.0	46.50	52.9								
TS-48	48.0	49.60	55.9								
TS-50	50.0	51.70	57.9								
TS-55	55.0	56.70	65.6	±0.25 (±0.5)	6.5	0.8	0.25 以下				
TS-60	60.0	61.80	70.6								
TS-65	65.0	67.00	75.6								
TS-70	70.0	72.00	80.6								
TS-75	75.0	77.50	85.6								
TS-80	80.0	82.40	90.6								
TS-85	85.0	86.50	95.6								
TS-90	90.0	92.70	100.6								
TS-100	100.0	103.00	110.6								
TS-110	110.0	113.30	120.6								
TS-120	120.0	122.40	130.6					±0.4	6.5	0.8	0.25 以下

※ ツイスターリングの寸法公差は、NBR70°に適用し、()内の公差はFKM70°に適用します。